


WHA-5000 LINE TYPE



►Features

- The product is manufactured from stainless steel which is excellent corrosion resistance, piston and air layer which absorbs water hammer. Normal water hammer arrester is installed at the end of pipe or near valve as orthogonal direction on pipe line and required additional space, but this special purposed water hammer arrester is installed as same direction on pipe line without any additional space.

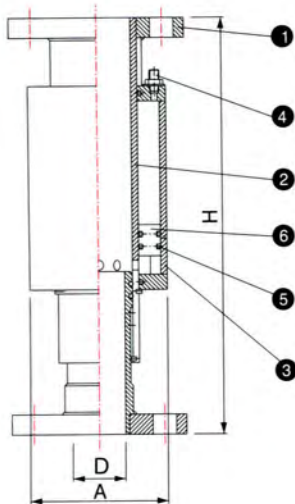

No.	Product	Material quality	Special Note
1	FLANGE	STS	(TYPE304),
2	INNER-BODY		(TYPE304)
3	OUTER-BODY		(HONING)
4	AIR INLET	BRASS	CR Coation
5	O-RING	EPDM	
6	PISTON	PLASTIC	ENGINEERING PLASTIC

- Operating pressure (PV) : 10kgf/cm², 20kgf/cm²
- Maximum operating pressure : 32kgf/cm²
- Maximum operating temperature : 100°C

►Product specifications

TYPE	A	H	FIXTURE CAPACITY UNIT	VOL(ℓ)
WHA-5050	114.3	280	50A	0.5
WHA-5065	114.3	300	65A	0.7
WHA-5080	165.2	340	80A	0.9
WHA-5100	165.2	390	100A	1.2
WHA-5125	216.3	440	125A	1.6
WHA-5150	216.3	500	150A	2.0
WHA-5200	267.4	550	200A	2.2
WHA-5250	355.6	600	250A	3.2
WHA-5300	355.6	680	300A	3.8